
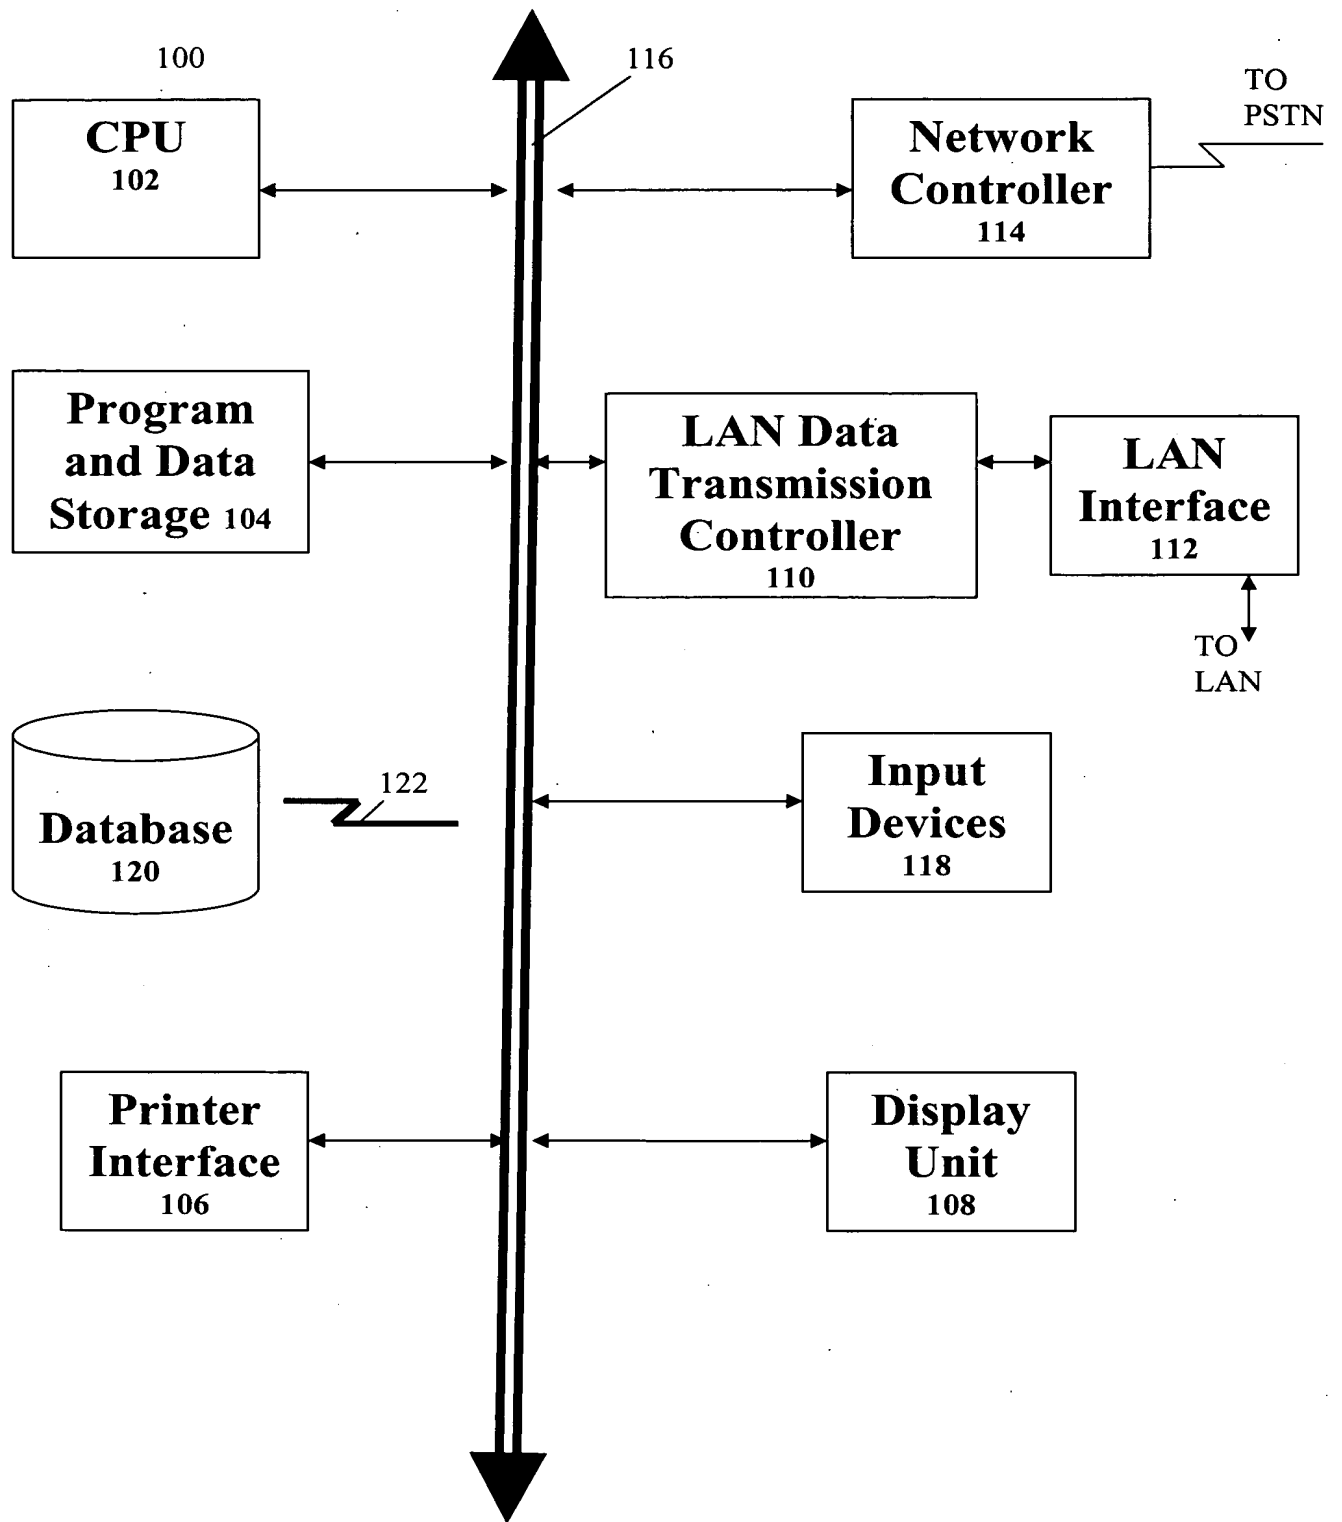
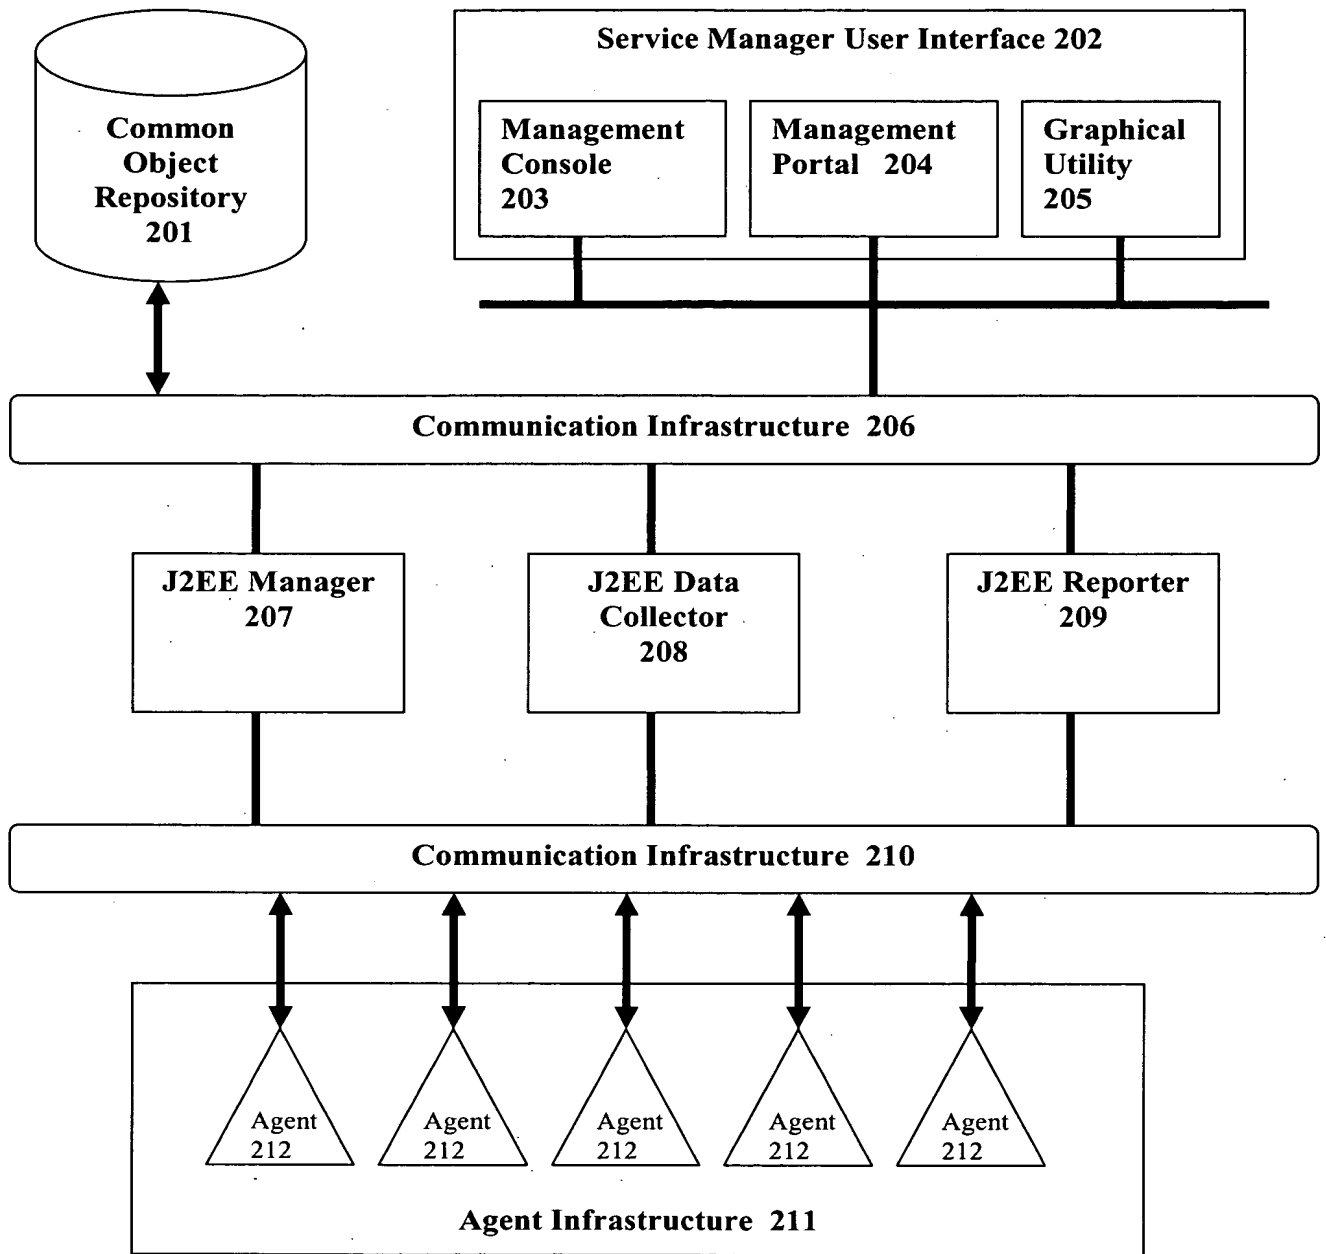


# FIGURE 1

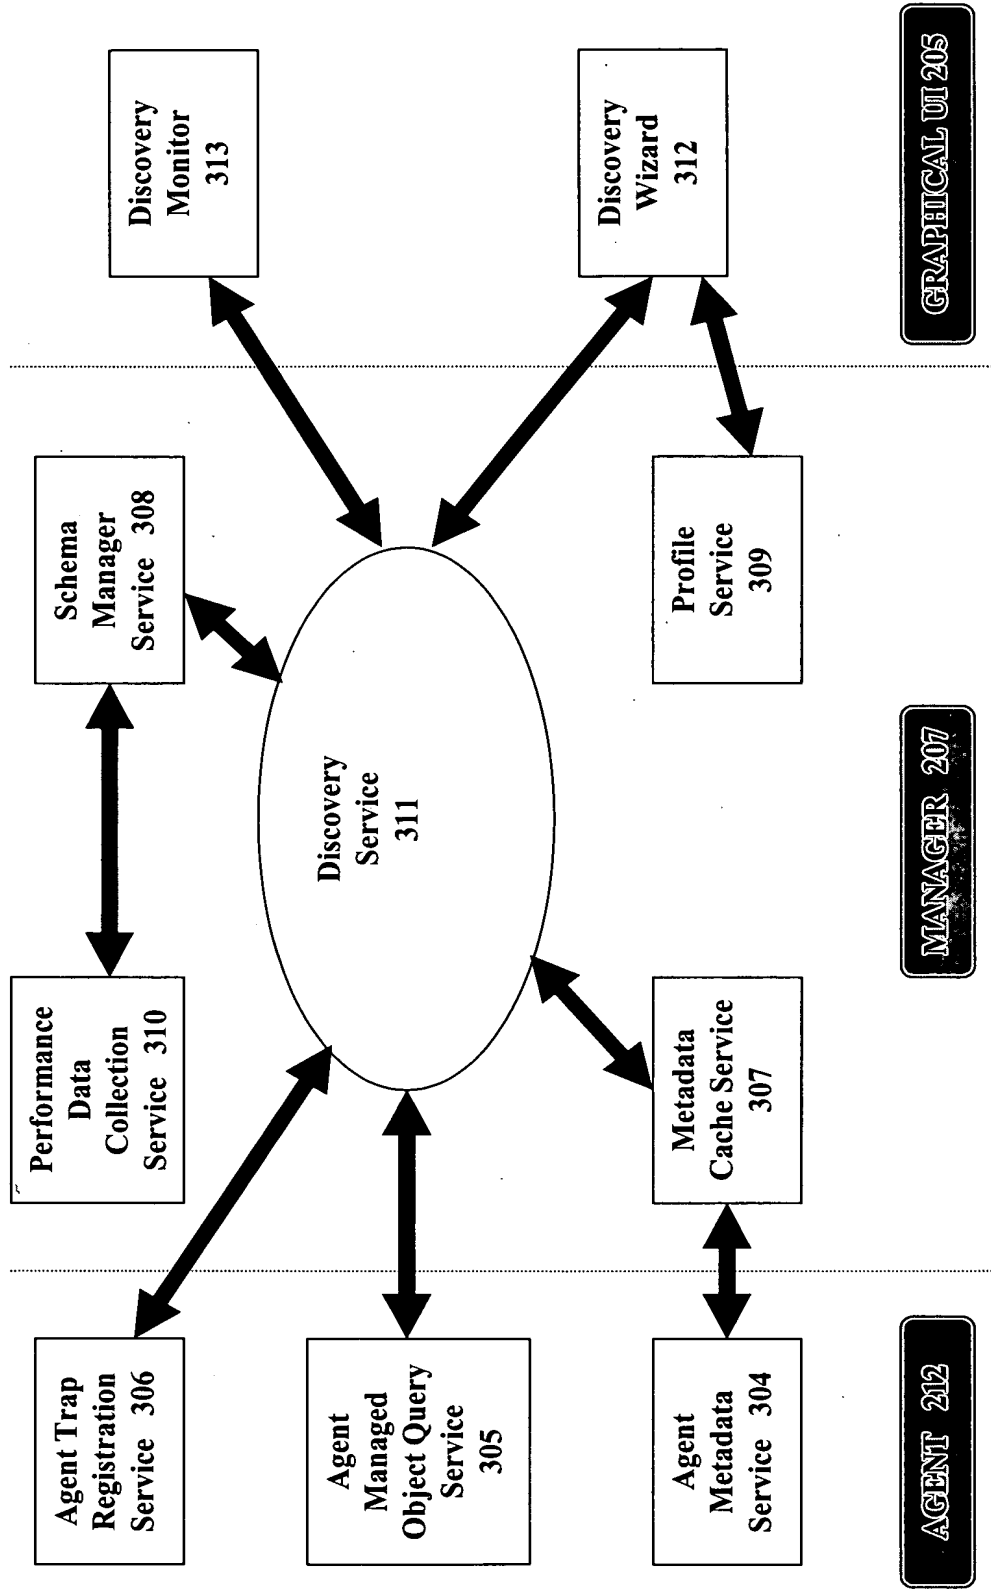


# FIGURE 2






**FIGURE 3**


## FIGURE 4

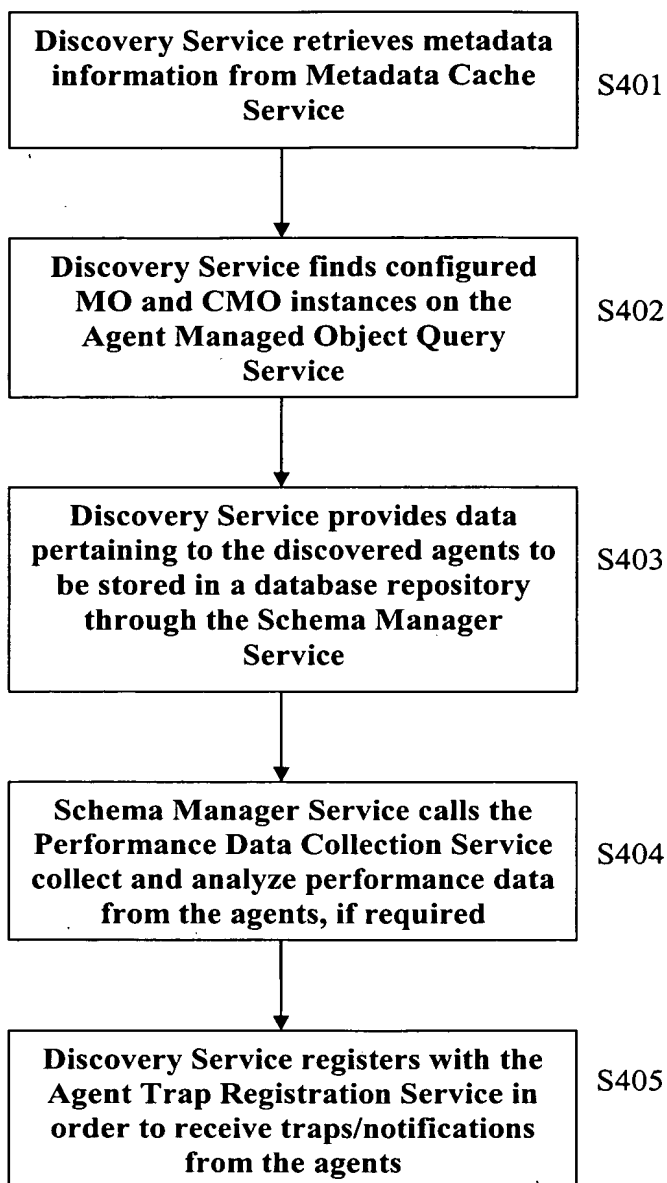


# FIGURE 5

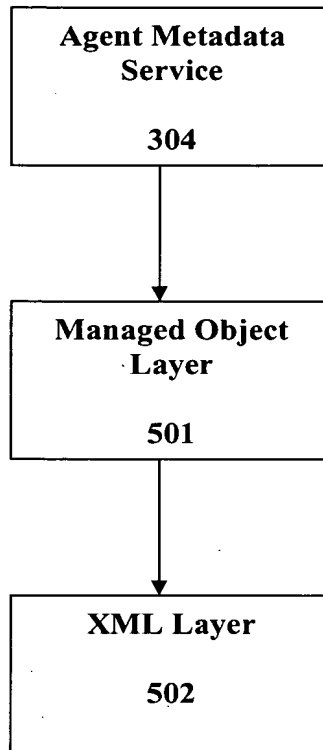

# FIGURE 6

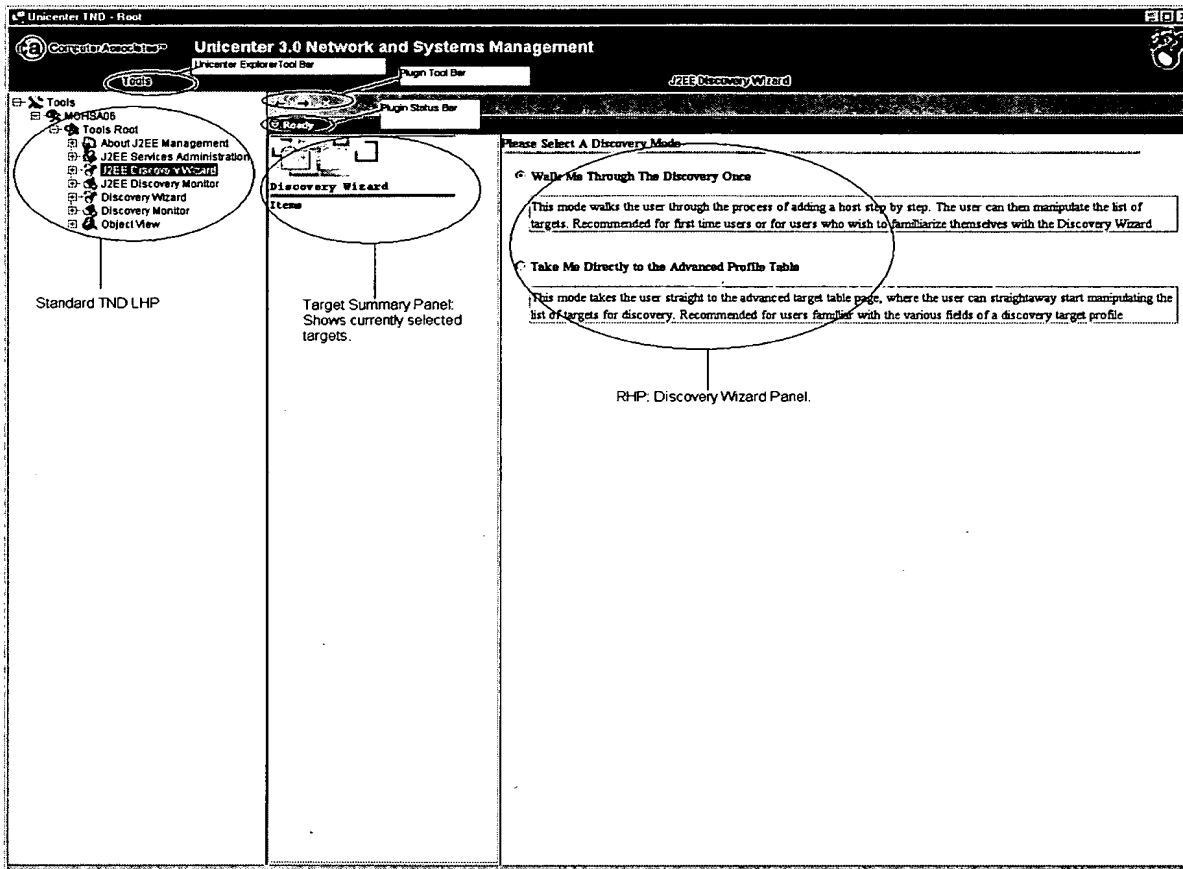

# FIGURE 7

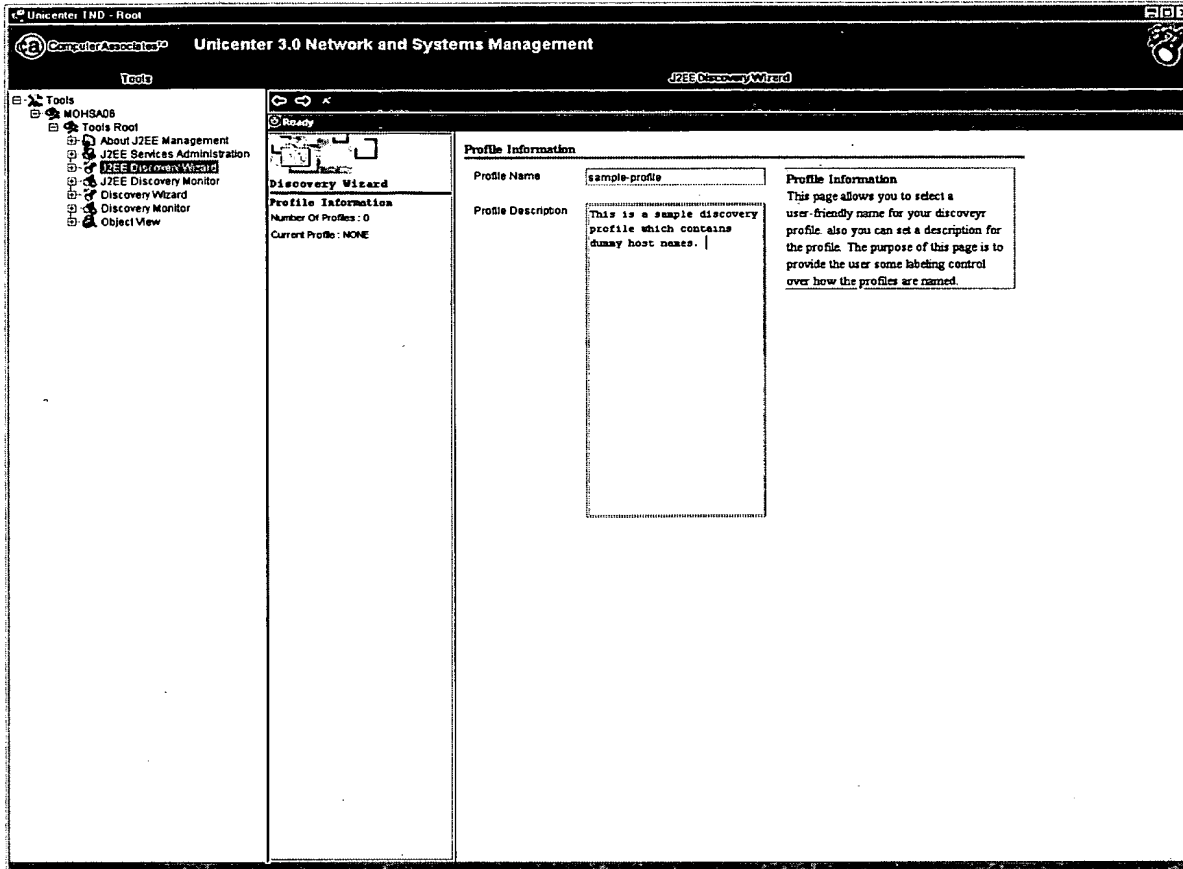

# FIGURE 8

Unicenter 1ND - Root

Computer Associates® Unicenter 3.0 Network and Systems Management

Tools

- Tools
- MOHSA08
  - Tools Root
  - About J2EE Management
  - J2EE Services Administration
  - J2EE Discovery Wizard
  - J2EE Discovery Monitor
  - Discovery Wizard
  - Discovery Monitor
  - Object View

Ready

Discovery Wizard

Agent Host Information

Agent Host Information

Number Of Profiles: 1

Current Profile: sample-profile

host(s) 227-5-3-qalab06

(example: host1,host2 or xxx.xxx.xxx.xxx - yyy)

☐ Use IP Address Range

127 0 0 1 10

(example: 178.16.145.244 - 248)

Choosing Your Agent Host

Hosts can either be specified by name or by address. There are two possible ways of specifying multiple hosts. One way is to specify a comma separated list of hosts/addresses or by checking the use range box one can specify an IP address range to discover.

port(s) 8052

(example: 8052,8055,8070-8080)

Choosing Your Agent Port

For specifying port numbers to run discovery against, the user can either specify one port (or a range of ports) or a number of ports separated by a comma.



# FIGURE 9

Unicenter TND - Root

Computer Associates® Unicenter 3.0 Network and Systems Management

Tools

Tools Root

MOHSA08

Tools Root

About J2EE Management

J2EE Services Administration

J2EE Discovery Wizard

J2EE Discovery Monitor

Discovery Wizard

Discovery Monitor

Object View

Ready

Discovery Wizard

Proxy Details

Number Of Profiles : 1

Current Profile : sample-profile

Proxy Details

☐ Manager Needs Proxy to reach the Agent

Agent Proxy Host: localhost

Agent Proxy Port: 8080

☐ Manager to Agent Proxy Authentication Required

Agent Proxy User Name: user

Agent Proxy Password: \*\*\*\*\*

Agent Proxy Details

This section allows the user to configure proxy options if any for the manager to reach the agent. In case the proxy uses authentication, the user can also supply proxy credentials here.

☐ Agent needs a proxy to reach the Manager

☒ Agent and Manager use the same proxy

Agent to Manager Proxy Host: localhost

Agent to Manager Proxy Port: 8080

☐ Agent to Manager Proxy Authentication Required

Agent to Manager Proxy Host: user

Agent to Manager Proxy Password: \*\*\*\*\*

Manager Proxy Details

This section allows the user to configure proxy options if any for the agent to reach the manager. In case the proxy uses authentication, the user can also supply proxy credentials here.

# FIGURE 10

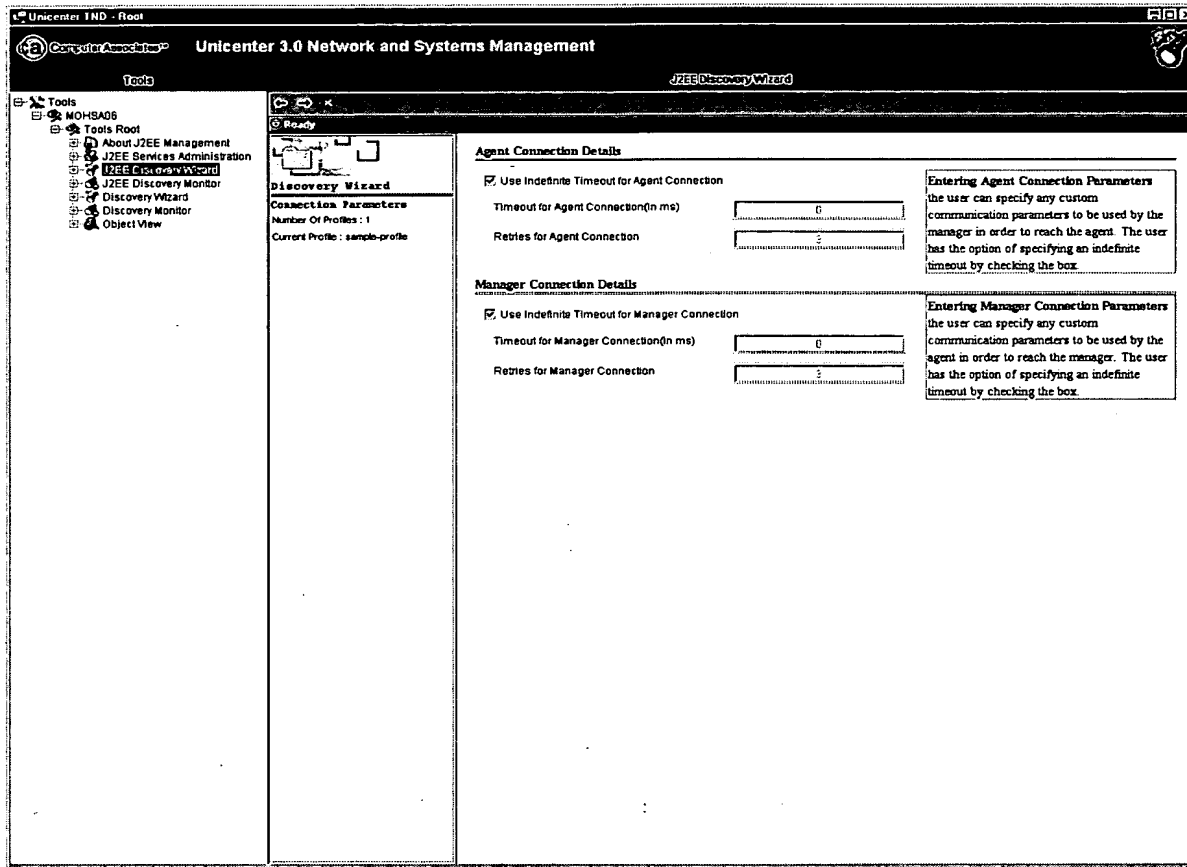


FIGURE 11

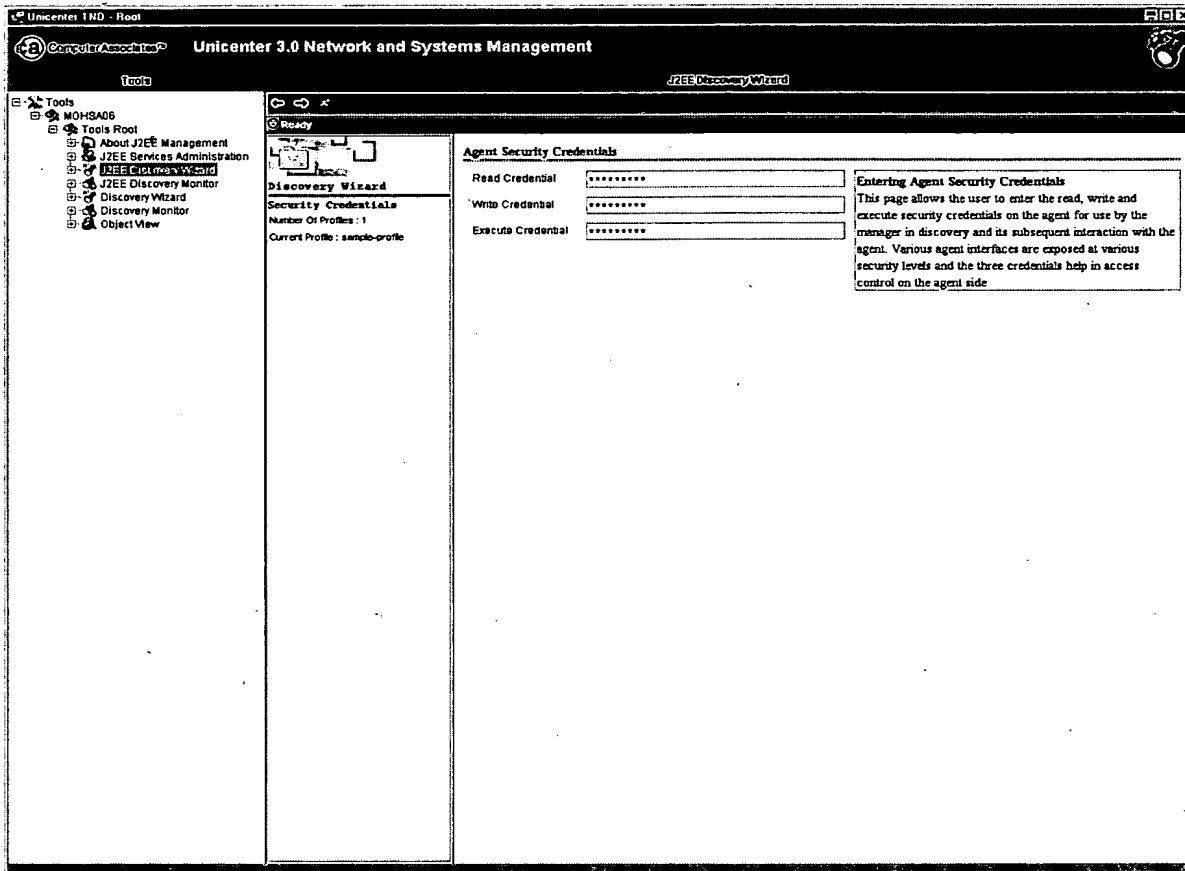


FIGURE 12

